


Plusrite® LED HQ FLOODLIGHT



Product Dimension: (mm)

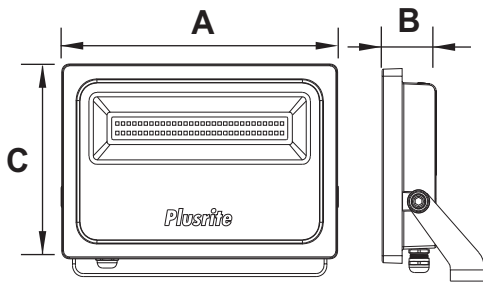

	A	B	C	Net Weight
LED-HQFDL10	140mm	39mm	118mm	0.50Kg
LED-HQFDL20	140mm	39mm	118mm	0.55Kg
LED-HQFDL30	243mm	50mm	203mm	1.54Kg
LED-HQFDL50	243mm	50mm	203mm	1.65Kg
LED-HQFDL70	310mm	55mm	231mm	3.00Kg
LED-HQFDL100	310mm	55mm	231mm	3.10Kg
LED-HQFDL150	420mm	70mm	330mm	6.10Kg
LED-HQFDL200	420mm	70mm	330mm	6.50Kg

IPART APPROVED #: 17312S14-PIGIBFA



Key Features

- Excellent thermal design; Reducing Heat and extending life of LED chips.
- Aluminum die-casting and outdoor rated powder coating housing.
- Long life, Unique design provides 50,000 hours life.
- IP65 Rated for outdoor use with 5 year warranty.
- Frosted lens to decrease the glare and providing a more traditional look.
- Lumileds 3030 LED chips with high efficiency.
- IK08 Rated, Protected against 5 joules of impact (The equivalent to the impact of a 1.7kg mass dropped from 300mm above the impacted surface)

Applications

- Parks • Stadiums • Billboards • Sculptures
- Parking Lots • Shopping Malls

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI(Ra)	IP Rate	Flex-In-Plug	Dimmable
LED-HQFDL10	100-240V	10W	950LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL20	100-240V	20W	1900LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL30	100-240V	30W	2850LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL50	100-240V	50W	4750LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL70	100-240V	70W	6650LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL100	100-240V	100W	9500LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL150	100-240V	150W	14250LM	5K	120°	>80	IP65	YES	NO
LED-HQFDL200	100-240V	200W	19000LM	5K	120°	>80	IP65	YES	NO