

Plusrite®



WARNING

1. Ensure power is off before starting installation, wiring or attempting any maintenance should be performed by a person familiar with the construction and operation of the product and hazards involved to ensure personal safety.
2. All work should be performed by a qualified electrician.
3. The wall should have the enough strength for installing the fixture; Its endurance must be more than the weight of fixture.

Installation

1. Turn off the power.
2. Unscrew it and take off the cover. (Figure 1)
3. Prepare the back plate for mounting by drilling or knocking out the appropriate holes. (Diagram 1)
4. Take off the aluminium reflector inside (Be careful your safety) (Figure 2)
5. Line up the back plate in desired location and mount securely. (Figure 3)
6. Connect the output lines: (Diagram 2)
 - Fire wire (L) to the Black line
 - Neutral wire (N) to the White line
 - Ground wire (G) to the Yellow line
7. Put the cover on and lock the cover (Figure 4)
8. Turn on the power.

Drill the holes

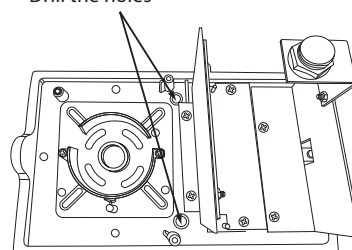


Diagram 1

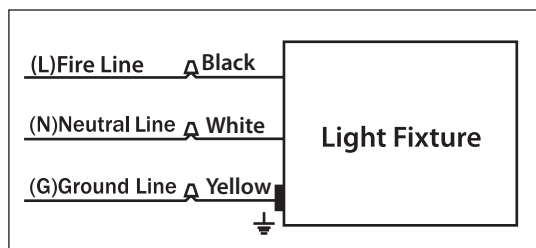


Diagram 2

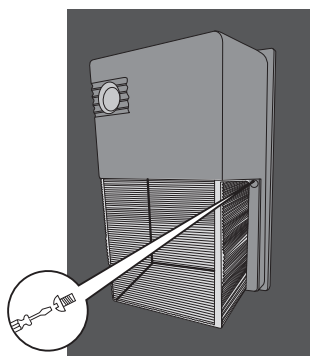


Figure 1

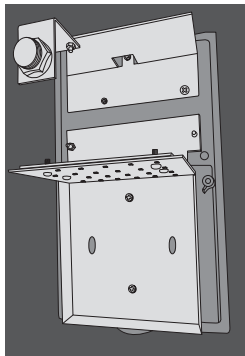


Figure 2

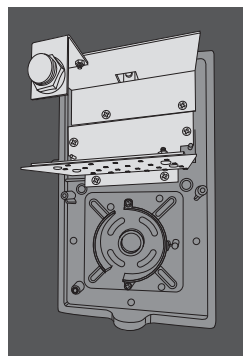


Figure 3

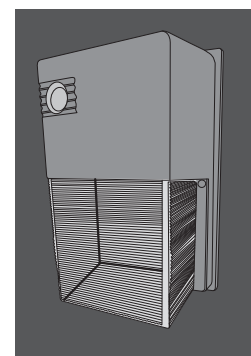


Figure 4