

NEW COLOUR TEMPERATURE CHANGEABLE BATTEN LIGHTS



IP44




SL-L2L-CDT125G20



SL-L2L-CDT250G40



Key Features

- Batten has terminal block , in which the batters can be connected to each other and linkable, easy to install.
- Long life, Unique design provides 50,000 hours life.
- Frosted cover to decrease the glare.
- SMD2835 LED chips with high efficiency.
- Flicker Free Driver.
- IP44 Rated for indoors use and bathrooms.
- Colour Temperature 3K 4K 5K Changeable by Switch.

Applications

- Office, Shops, Warehouse, Car parking area, Home, Supermarket, etc.

Model.	LED Type	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Frame colour	Warranty	IP RATING	Dimmable
SL-L2L-CDT125G20	SMD2835	125pcs	3K 4K 5K	100~265V	120°	20W	2000lm	>80	White	3 years	IP44	NO
SL-L2L-CDT250G40	SMD2835	250pcs	3K 4K 5K	100~265V	120°	40W	4000lm	>80	White	3 years	IP44	NO



Model	Size A(mm)	Size B(mm)	Size C(mm)
SL-L2L-CDT125G20	600	72	38
SL-L2L-CDT250G40	1200	72	38

Product: SL-L2L-CDT125G20

Net Weight: 0.39 kg

Outer ctn size: 625*345*250mm

Q'ty per ctn: 20 pcs

G.W per ctn: 8.6 kg

Product: SL-L2L-CDT250G40


Net Weight: 0.70 kg

Outer ctn size: 1225*345*250mm



Q'ty per ctn: 20 pcs

G.W per ctn: 15.5 kg

Single installation

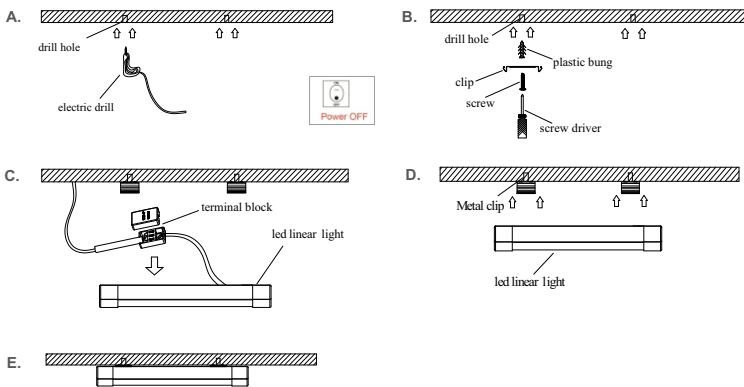

Linkable installation

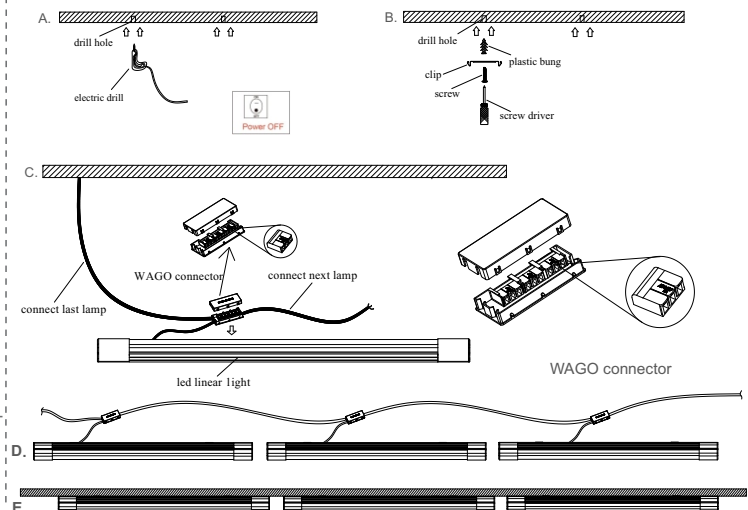

- Single installation no need to open the small plastic cover
- Linkable installation needs to open the small plastic cover