

# Plusrite®

## LED Commercial Downlight Shop Lighter Range



### NEW COLOUR CHANGEABLE DOWNLIGHT AND SHOP LIGHTER

1 ON & 2 OFF= WW 3000K / 1 OFF & 2 ON= CW 5000K/ 1 ON & 2 ON = NW 4000K

**VEET APPROVED #: 5609**

### Key Features

- Dimmable on Leading Edge, Trailing Edge, Universal 3-100% also C-Bus & Dynalite Systems.
- Colour temperature changeable on back of downlight.
- Ip44 Rated for indoors use and bathrooms.
- Frosted lens to decrease the glare.
- Power factor 0.95.
- IC-F certified; can be covered with normal building material without thermal risk
- Flex in plug.



AU08-DL20W/W/BS  
AU08-DL30W/W/BS  
AU08-DL40W/W/BS



AU08-DL50W/W/3K  
AU08-DL50W/W/5K

(These are not colour changeable downlights)

### TECHNICAL SPECIFICATIONS

### Applications

- Shopping Centres, Hotels, Restaurants, Homes, Show Rooms, etc.



AU01-DLR40W/W/BS  
AU01-DLR50W/W/BS

Model.	LED Type	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Frame colour	Warranty	IP RATING	Dimmable
AU08-DL20W/W/BS	SMD2835	96pcs	3K 4K 5K	200~240v	120°	20W	2030-2080lm	80	White	5 years	IP44	Yes
AU08-DL30W/W/BS	SMD2835	144pcs	3K 4K 5K	200~240v	120°	30W	3030-3080lm	80	White	5 years	IP44	Yes
AU08-DL40W/W/BS	SMD2835	196pcs	3K 4K 5K	200~240v	120°	40W	4030-4080lm	80	White	5 years	IP44	Yes
AU08-DL50W/W/3K	SMD2835	240pcs	3K	200~240v	120°	50W	5030-5080lm	80	White	5 years	IP44	Yes
AU08-DL50W/W/5K	SMD2835	240pcs	5K	200~240v	120°	50W	5030-5080lm	80	White	5 years	IP44	Yes
AU01-DLR40W/W/BS	SMD3030	96pcs	3K 4K 5K	200~240v	120°	40W	3630-3680lm	80	White	3 years	IP44	Yes
AU01-DLR50W/W/BS	SMD3030	120pcs	3K 4K 5K	200~240v	120°	50W	4530-4580lm	80	White	3 years	IP44	Yes




# Plusrite®


## LED Commercial Downlight Shop Lighter Range




### Product Dimension: (mm)




**AU08-DL20W/W/BS**  
**AU08-DL30W/W/BS**



**AU08-DL40W/W/BS**

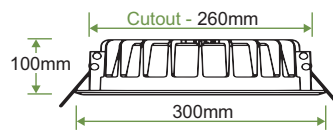

**AU08-DL50W/W/3K**  
**AU08-DL50W/W/5K**

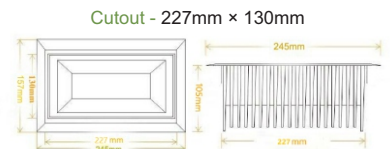

**AU01-DLR40W/W/BS**  
**AU01-DLR50W/W/BS**

### PACKING DETAILS:

Product: **AU08-DL20W/W/BS**  
**AU08-DL30W/W/BS**

Net Weight: 0.89kg  
Inner box size: 260\*225\*65mm  
Outer ctn size: 465\*450\*270mm  
Q'ty per ctn: 14 pcs  
G.W per ctn: 16.5 kg

Product: **AU08-DL40W/W/BS**

Net Weight: 1.18 kg  
Inner box size: 290\*260\*65mm  
Outer ctn size: 540\*480\*320mm  
Q'ty per ctn: 14 pcs  
G.W per ctn: 20.5 kg


Product: **AU08-DL50W/W/3K**  
**AU08-DL50W/W/5K**

Net Weight: 2.05 kg  
Inner box size: 325\*110\*325mm  
Outer ctn size: 335\*335\*375mm  
Q'ty per ctn: 3 pcs  
G.W per ctn: 8.8 kg


Product: **AU01-DLR40W/W/BS**  
**AU01-DLR50W/W/BS**

Net Weight: 1.90 kg  
Inner box size: 245\*153\*115mm  
Outer ctn size: 548\*390\*395mm  
Q'ty per ctn: 8 pcs  
G.W per ctn: 16.2 kg


### PHOTOMETRIC DATA

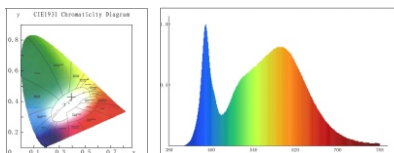


**AU08-DL20W/W/BS**

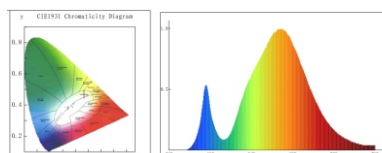


**AU08-DL30W/W/BS**

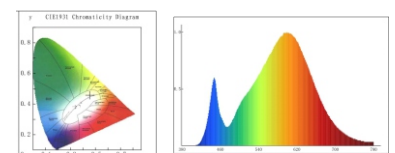


**AU08-DL40W/W/BS**

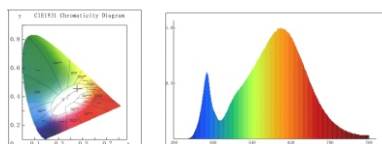

**AU08-DL50W/W**

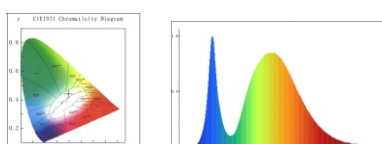

**AU01-DLR40W/W/BS**

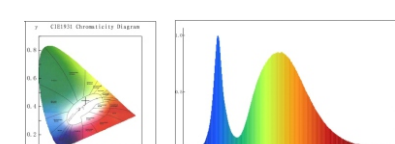

**AU01-DLR40W/W/BS**

