

Plusrite®

LED OYSTER LIGHT



NEW BACK SWITCH CHANGEABLE COLOUR TEMP OYSTER LIGHT

W=3K, N=4K, C=5K



Unit: (mm)




PL05-12AH-PRE



PL05-18AH-PRE



PL05-28AH-PRE

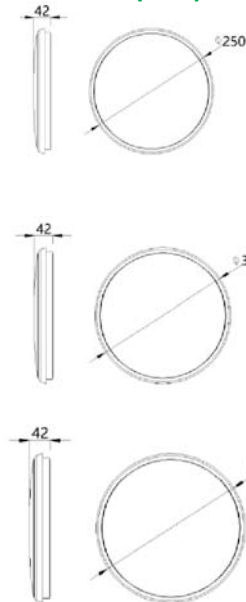

Key Features

- Double Insulated.
- Dimmable on Leading Edge, Trailing Edge, Universal 3-100% also C-Bus & Dynalite Systems.
- Colour temperature changeable, WW 3K, NDL 4K, Daylight 5K, on back of the oyster light.
- IP54 Rated for indoors use and bathrooms and under eaves with 3 year warranty.
- Frosted lens to decrease the glare.
- LED Chips SMD 2835, Power factor 0.95.
- Large terminal block for easy installation and reducing time.
- Slim line Oyster Light, that surface mounts flush on ceiling with easy bracket mounting.
- 3 diameter sizes to choose from, 250mm, 300mm, 400mm with depth only 42mm.

Applications

- Shopping Centres, Restaurants, Homes, Hotels, Show Rooms, etc.

TECHNICAL SPECIFICATIONS

Model.	LED Type	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	IK RATING	Frame colour	Warranty	IP RATING	Dimmable
PL05-12AH-PRE	SMD2835	42pcs	3K 4K 5K	200~240v	120°	12W	980-1050lm	IK08	White	3 years	IP54	Yes
PL05-18AH-PRE	SMD2835	60pcs	3K 4K 5K	200~240v	120°	18W	1480-1580lm	IK08	White	3 years	IP54	Yes
PL05-28AH-PRE	SMD2835	84pcs	3K 4K 5K	200~240v	120°	28W	2300-2450lm	IK08	White	3 years	IP54	Yes

PACKING DETAILS:

PL05-12AH-PRE

Net Weight: 0.60 kg
Outer ctn size: 540*320*365mm
Q'ty per ctn: 10 pcs
G.W per ctn: 9 kg

PL05-18AH-PRE

Net Weight: 0.90 kg
Outer ctn size: 620*330*415mm
Q'ty per ctn: 10 pcs
G.W per ctn: 12 kg

PL05-28AH-PRE

Net Weight: 1.10 kg
Outer ctn size: 650*430*515mm
Q'ty per ctn: 10 pcs
G.W per ctn: 13 kg

Installation:

