

# Plusrite®

## LED CANOPY LIGHT



LED-FXSCM60/50K-II



LED-FXSCM60/50K/E-II



FXSCM59/50K/BK



FXSCM59/50K/BK/SEN



FXGSC75W



FXGSC100W  
FXGSC150W



FXRC130/50K



FXCCM200/5K



### Key Features

- Emergency Power Canopy LED-FXSCM60/50K/E-II comes with Lithium battery(3000MAH).
- Excellent thermal design; Reducing Heat and extending life of LED chips.
- Aluminum die-casting and outdoor rated powder coating housing.
- Long life, Unique design provides 50,000 hours life.
- IP65 Rated for outdoor use with 5 year warranty.
- Lumileds 3030 LED chips with high efficiency.
- Flex-In-Plug.

### Applications

- Gas Station, Warehouse, Factory, Parking Area, Bus and Train Stations, Outdoor, etc.

## TECHNICAL SPECIFICATIONS

Model.	LED TYPE	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Housing colour	Warranty	IP RATING	Dimmable
LED-FXSCM60/50K-II	SMD	59pcs	5K	90~305V	160°	60W	7000lm	>80	Black	5 years	IP65	1-10V
* LED-FXSCM60/50K/E-II	SMD	59pcs	5K	90~305V	160°	60W	7000lm	>80	Black	5 years	IP65	1-10V
FXSCM59/50K/BK	SMD	56pcs	5K	90~305V	160°	59W	6785lm	>80	Black	5 years	IP65	1-10V
* FXSCM59/50K/BK/SEN	SMD	56pcs	5K	90~305V	160°	59W	6785lm	>80	Black	5 years	IP65	1-10V
FXGSC75W	SMD	72pcs	4K/5K	90~305V	120°	75W	9000lm	>80	White	5 years	IP65	1-10V
FXGSC100W	SMD	92pcs	4K/5K	90~305V	120°	100W	12000lm	>80	White	5 years	IP65	1-10V
FXGSC150W	SMD	114pcs	4K/5K	90~305V	120°	150W	18000lm	>80	White	5 years	IP65	1-10V
FXRC130/50K	SMD	140pcs	5K	90~305V	120°	130W	13000lm	>80	White	5 years	IP65	NO
FXCCM200/5K	SMD	228pcs	5K	90~305V	100°	200W	19000lm	>80	White	5 years	IP65	NO

\* LED-FXSCM60/50K/E-II: This Canopy comes with 15W Emergency Power with Lithium battery(9.6V 3000MAH) minimum 90 minutes or more.


\* FXSCM59/50K/BK/SEN: This Canopy comes with sensor inside.

# Plusrite®


## LED CANOPY LIGHT




### Product Dimension: (mm)

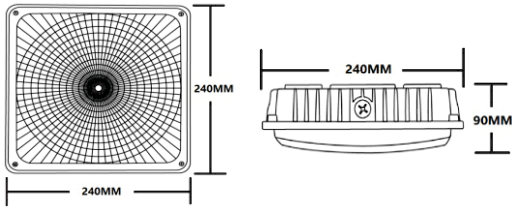


**FXSCM59/50K/BK**  
**FXSCM59/50K/BK/SEN**

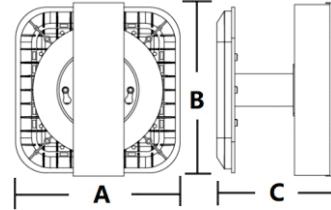


**FXGSC75W : A:325mm B:325mm C:228mm**  
**FXGSC100W : A:480mm B:480mm C:245mm**  
**FXGSC150W : A:480mm B:480mm C:245mm**



**LED-FXSCM60/50K-II**  
**LED-FXSCM60/50K/E-II**

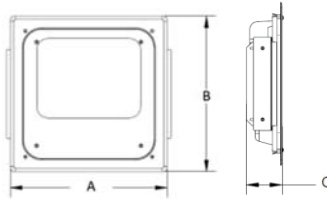

**FXRC130/50K**  
**A:420mm B:420mm C:90mm**

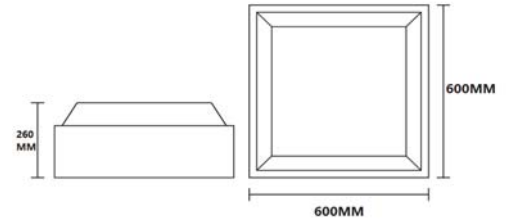

**FXCCM200/5K**

### PACKING DETAILS:

Product: **LED-FXSCM60/50K-II**  
**LED-FXSCM60/50K/E-II**

Net Weight: 2.35 kg  
Outer ctn size: 380\*380\*185mm  
Q'ty per ctn: 1 pc  
G.W per ctn: 2.9 kg

Product: **FXSCM59/50K/BK**  
**FXSCM59/50K/BK/SEN**

Net Weight: 2.35 kg  
Outer ctn size: 280\*280\*145mm  
Q'ty per ctn: 1 pc  
G.W per ctn: 2.84 kg

Product: **FXGSC75W**

Net Weight: 6.2 kg  
Outer ctn size: 410\*380\*245mm  
Q'ty per ctn: 1 pc  
G.W per ctn: 8.2 kg

Product: **FXGSC100W**  
**FXGSC150W**

Net Weight: 8.2 kg  
Outer ctn size: 720\*550\*260mm  
Q'ty per ctn: 1 pc  
G.W per ctn: 10.2 kg



Product: **FXRC130/50K**

Net Weight: 7.35 kg  
Outer ctn size: 530\*530\*195mm  
Q'ty per ctn: 1 pc  
G.W per ctn: 8 kg

Product: **FXCCM200/5K**

Net Weight: 19.8 kg  
Outer ctn size: 680\*680\*330mm  
Q'ty per ctn: 1 pc  
G.W per ctn: 22.8 kg

### SENSOR information for FXSCM59/50K/BK/SEN

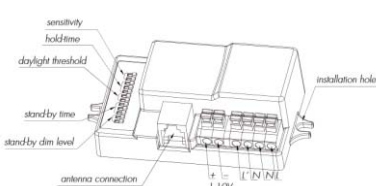

	1	2	
I	●	●	100%
II	●	○	75%
III	○	●	50%
IV	○	○	10%

**Sensitivity**

	1	2	3	
I	●	●	●	5s
II	●	●	○	30s
III	●	○	○	1min
IV	●	○	○	5min
V	○	●	●	10min
VI	○	○	●	20min
VII	○	○	○	30min

**Hold-time**

	1	2	
I	●	●	Disable
II	●	○	50Lux
III	○	●	10Lux
IV	○	○	2Lux

**Daylight threshold**

	1	2	3	
I	●	●	○	0s
II	●	○	○	10s
III	●	○	○	1min
IV	●	○	○	5min
V	○	●	○	10min
VI	○	○	●	30min
VII	○	○	○	1h
VIII	○	○	○	+∞

**Stand-by time**

	1	2	
I	●	●	10%
II	●	○	20%
III	○	●	30%
IV	○	○	50%

**Stand-by dim level**