




NEW BACK SWITCH CHANGEABLE COLOUR TEMP/DOWNLIGHTS



DL28-10-PRE

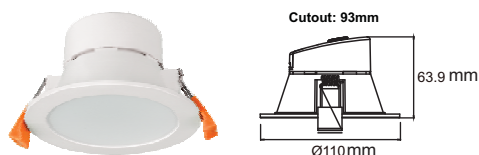

Key Features


- Dimmable on Leading Edge, Trailing Edge, Universal 3-100% also C-Bus & Dynalite Systems.
- Colour temperature changeable on back of downlight.
- IP44 Rated for indoors use and bathrooms.
- Frosted lens to decrease the glare.
- LED Chips SMD 2835, Power factor 0.95.
- IC-F or IC-4 certified; can be covered with normal building material without thermal risk.
- Flex in plug.

Applications

- Shopping Centres, Hotels, Restaurants, Homes, Show Rooms, etc.



PL26-13-PR-02



Product: **DL28-10-PRE**

Net Weight: 0.21kg
Outer ctn size: 480*360*310mm
Q'ty per ctn: 36 pcs
G.W per ctn: 10.4 kg

Product: **PL26-13-PR-02**

Net Weight: 0.26kg
Outer ctn size: 480*360*310mm
Q'ty per ctn: 36 pcs
G.W per ctn: 12.9 kg




DL30-10

Choice of 3K or 5K

Anti-Glare Downlight

Looking at downlight at a 30° angle or more
There is no glare.

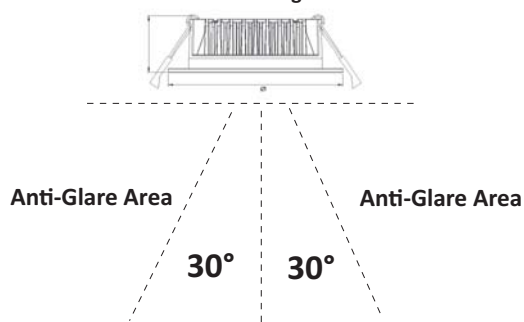

DL30-10 Flat SMD Downlight

Product: **DL30-10**
Net Weight: 0.3kg
Outer ctn size: 480*360*310mm
Q'ty per ctn: 36 pcs
G.W per ctn: 13.6 kg

TECHNICAL SPECIFICATIONS

Model.	LED Type	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Frame colour	Warranty	IP RATING	Dimmable
DL28-10-PRE	SMD2835	40pcs	3K 4K 5K	200~240v	90°	10W	800-900lm	80	White	3 years	IP44	Yes
DL30-10-3K	SMD2835	40pcs	3K	200~240v	60°	10W	900lm	80	White	3 years	IP44	Yes
DL30-10-5K	SMD2835	40pcs	5K	200~240v	60°	10W	950lm	80	White	3 years	IP44	Yes
PL26-13-PR-02	SMD2835	52pcs	3K 4K 5K	200~240v	90°	13W	1050-1150lm	80	White	3 years	IP44	Yes

