

# Plusrite®

## LED Commercial Downlight Shop Lighter Range



### NEW COLOUR CHANGEABLE DOWNLIGHT AND SHOP LIGHTER


1 ON & 2 OFF= WW 3000K / 1 OFF & 2 ON= CW 5000K/ 1 ON & 2 ON = NW 4000K



AU26-DL25W/W/BS  
AU26-DL35W/W/BS

#### Anti-Glare Downlight

Looking at downlight at a 30° angle or more  
There is no glare.

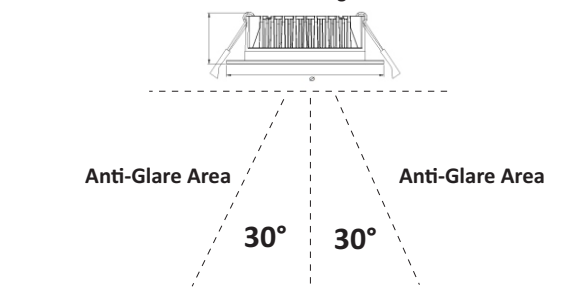

### Key Features

- Dimmable on Leading Edge, Trailing Edge, Universal 3-100% also C-Bus & Dynalite Systems.
- Colour temperature changeable on back of downlight.
- IP44 Rated for indoors use and bathrooms.
- Frosted lens to decrease the glare.
- Power factor 0.95.
- IC-F certified; can be covered with normal building material without thermal risk.
- Flex in plug.

**VEET APPROVED #: 5609**

### Applications

- Shopping Centres, Hotels, Restaurants, Homes, Show Rooms, etc.



AU08-DL20W/W/BS  
AU08-DL30W/W/BS  
AU08-DL40W/W/BS



AU08-DL50W/W/3K  
AU08-DL50W/W/5K



AU01-DLR40W/W/BS  
AU01-DLR50W/W/BS

### TECHNICAL SPECIFICATIONS

(These are not colour changeable downlights)


Model.	LED Type	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Frame colour	Warranty	IP RATING	Dimmable
AU08-DL20W/W/BS	SMD2835	96pcs	3K 4K 5K	200~240v	120°	20W	2030-2080lm	80	White	5 years	IP44	Yes
AU08-DL30W/W/BS	SMD2835	144pcs	3K 4K 5K	200~240v	120°	30W	3030-3080lm	80	White	5 years	IP44	Yes
AU08-DL40W/W/BS	SMD2835	196pcs	3K 4K 5K	200~240v	120°	40W	4030-4080lm	80	White	5 years	IP44	Yes
AU08-DL50W/W/3K	SMD2835	240pcs	3K	200~240v	120°	50W	5030-5080lm	80	White	5 years	IP44	Yes
AU08-DL50W/W/5K	SMD2835	240pcs	5K	200~240v	120°	50W	5030-5080lm	80	White	5 years	IP44	Yes
AU01-DLR40W/W/BS	SMD3030	96pcs	3K 4K 5K	200~240v	120°	40W	3630-3680lm	80	White	3 years	IP44	Yes
AU01-DLR50W/W/BS	SMD3030	120pcs	3K 4K 5K	200~240v	120°	50W	4530-4580lm	80	White	3 years	IP44	Yes
AU26-DL25W/W/BS	SMD2835	120pcs	3K 4K 5K	200~240v	90°	25W	2000-2100lm	80	White	3 years	IP44	Yes
AU26-DL35W/W/BS	SMD2835	180pcs	3K 4K 5K	200~240v	90°	35W	2800-2900lm	80	White	3 years	IP44	Yes

# Plusrite®


## LED Commercial Downlight Shop Lighter Range




### Product Dimension: (mm)




**AU08-DL20W/W/BS**  
**AU08-DL30W/W/BS**




**AU08-DL40W/W/BS**

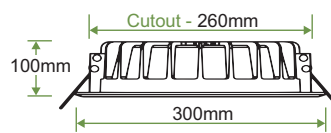


**AU08-DL50W/W/3K**  
**AU08-DL50W/W/5K**

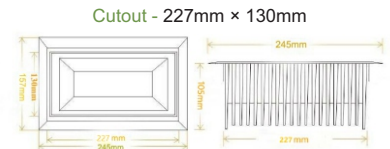

**AU01-DLR40W/W/BS**  
**AU01-DLR50W/W/BS**

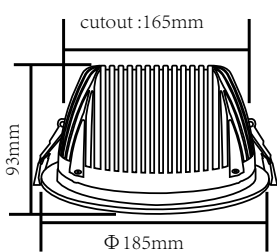

**AU26-DL25W/W/BS**

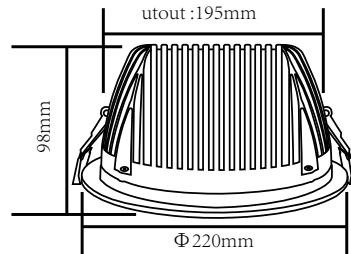

**AU26-DL35W/W/BS**

### PACKING DETAILS:

Product: **AU08-DL20W/W/BS**  
**AU08-DL30W/W/BS**

Net Weight: 0.89kg  
Inner box size: 260\*225\*65mm  
Outer ctn size: 465\*450\*270mm  
Q'ty per ctn: 14 pcs  
G.W per ctn: 16.5 kg

Product: **AU08-DL40W/W/BS**

Net Weight: 1.18 kg  
Inner box size: 290\*260\*65mm  
Outer ctn size: 540\*480\*320mm  
Q'ty per ctn: 14 pcs  
G.W per ctn: 20.5 kg

Product: **AU08-DL50W/W/3K**  
**AU08-DL50W/W/5K**

Net Weight: 2.05 kg  
Inner box size: 325\*110\*325mm  
Outer ctn size: 335\*335\*375mm  
Q'ty per ctn: 3 pcs  
G.W per ctn: 8.8 kg

Product: **AU01-DLR40W/W/BS**  
**AU01-DLR50W/W/BS**

Net Weight: 1.90 kg  
Inner box size: 245\*153\*115mm  
Outer ctn size: 548\*390\*395mm  
Q'ty per ctn: 8 pcs  
G.W per ctn: 16.2 kg

Product: **AU26-DL25W/W/BS**

Net Weight: 0.90 kg  
Inner box size: 190\*190\*105mm  
Outer ctn size: 440\*395\*400mm  
Q'ty per ctn: 16 pcs  
G.W per ctn: 16.20 kg

Product: **AU26-DL35W/W/BS**

Net Weight: 1.10 kg  
Inner box size: 230\*230\*110mm  
Outer ctn size: 475\*460\*480mm  
Q'ty per ctn: 16 pcs  
G.W per ctn: 19.00 kg

