





PRODUCT DETAILS



PLS-30W



Unit: MM




Key Features


- LED Solar Street light
- No AC power cables, no electrical charges
- Polycrystalline Solar panel
- Lithium battery
- Motion sensor, dim down to 30% lumen output when there is no movement detected.



PLS-90W



PLS-150W



PACKING DETAILS:


Product: PLS-30W
 PLS-90W
 PLS-150W

Net Weight: 1.50 / 2.60 / 4.20 kg
 490*375*255mm

Outer ctn size: 665*375*275mm
 860*305*275mm

Q'ty per ctn: 10 / 5 / 4 pc
 G.W per ctn: 16.50 / 15.00 / 19.00 kg

| MODEL NUMBER | Wattage | Materials | LED CHIPS | LED Q'ty (pcs) | LUMENS | CCT | Solar Panel | Battery | Charging Time | Discharging Time | CRI | DIMMABLE | Warranty |
|--------------|---------|-----------|-----------|----------------|---------|----------|-------------|----------|---------------|------------------|------|----------|----------|
| PLS-30W | 30W | ABS | SMD5730 | 60 | 3000lm | 4K 5K 6K | 6V 7W | 12000mAh | 6-8 Hours | 10-12 Hours | > 80 | Yes | 3 year |
| PLS-90W | 90W | ABS | SMD5730 | 180 | 9000lm | 4K 5K 6K | 6V 11.5W | 24000mAh | 6-8 Hours | 10-12 Hours | > 80 | Yes | 3 year |
| PLS-150W | 150W | ABS | SMD5730 | 300 | 15000lm | 4K 5K 6K | 6V 22W | 36000mAh | 6-8 Hours | 12-14 Hours | > 80 | Yes | 3 year |

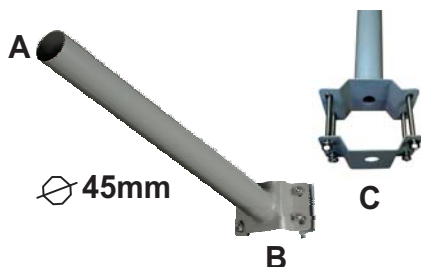


This bracket will come with the solar street light.

This bracket can be installed on the wall or any pole with the diameter 45mm to 100mm.

End A connect to the light.
 End B connect to the wall or the pole and End C connect to the back of the pole.

MOTION SENSOR INSTRUCTION

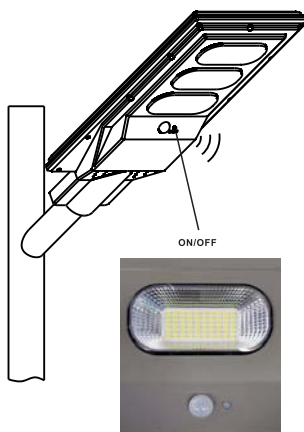

1. Press the ON/OFF button once. The light flashes once and works at motion sensor mode, standby 30% light output if no motion.
2. Press the ON/OFF button again. The light flashes twice and works at constant brightness mode when dark.
3. Hold down the ON/OFF button to turn off the light.