



NEW BACK SWITCH CHANGEABLE COLOUR TEMP/DOWNLIGHTS



PL9-TRI-60-G



DL28-10-PRE

Key Features



- Dimmable on Leading Edge, Trailing Edge, Universal 100%-3% also C-Bus & Dynalite Systems.
- Colour temperature changeable on back of downlight.
- IP44 Rated for indoors use and bathrooms.
- Frosted lens to decrease the glare.
- LED Chips SMD 2835, Power factor 0.95.
- IC-F or IC-4 certified; can be covered with normal building material without thermal risk.
- Flex in plug.

Applications


- Shopping Centres, Hotels, Restaurants, Homes, Show Rooms, etc.



PL26-13-PR-02




AU22-DL15W/W/BS

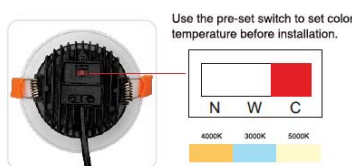

PL26-13-PR-02


Product: PL9-TRI-60-G
DL28-10-PRE
PL26-13-PR-02
AU22-DL15W/W/BS
Net Weight: 0.20/0.21/0.25/0.46kg
Outer ctn size: 495*420*260mm/510*365*270mm
Q'ty per ctn: 40/40/36/33 pcs
G.W per ctn: 11.10/11.40/12.90/18.10 kg

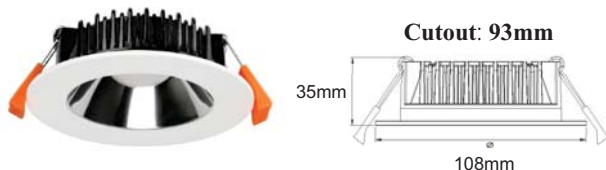

DL30-10-3K
DL30-10-5K

Anti-Glare Downlight

Looking at downlight at a 30° angle or more
There is no glare.

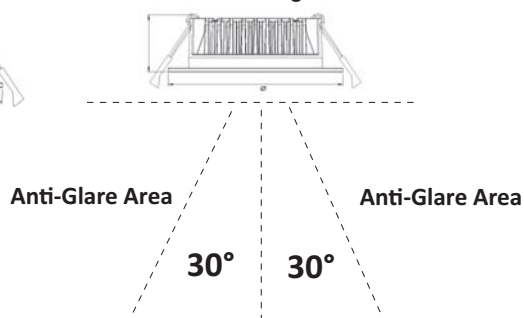

DL30-10 Flat SMD Downlight
Product: DL30-10-3K
DL30-10-5K
Net Weight: 0.3kg
Outer ctn size: 480*360*310mm
Q'ty per ctn: 36 pcs
G.W per ctn: 13.6 kg

TECHNICAL SPECIFICATIONS

Model.	LED Type	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Frame colour	Warranty	IP RATING	Dimmable	Driver
PL9-TRI-60-G	COB	1pc	3K 4K 5K	200~240v	60°	9W	750-850lm	80	White	3 years	IP44	Yes	External
DL28-10-PRE	SMD2835	40pcs	3K 4K 5K	200~240v	120°	10W	850-950lm	80	White	3 years	IP44	Yes	Internal
DL30-10-3K	SMD2835	40pcs	3K	200~240v	60°	10W	900lm	80	White	3 years	IP44	Yes	External
DL30-10-5K	SMD2835	40pcs	5K	200~240v	60°	10W	950lm	80	White	3 years	IP44	Yes	External
PL26-13-PR-02	SMD2835	52pcs	3K 4K 5K	200~240v	90°	13W	1050-1150lm	80	White	3 years	IP44	Yes	External
AU22-DL15W/W/BS	SMD2835	64pcs	3K 4K 5K	200~240v	38°	15W	1200-1350lm	80	White	3 years	IP44	Yes	External