

Plusrite®

LED CANOPY LIGHT



RoHS
COMPLIANT

CE



SAA



IP65



FXRC130/50K



FXGSC150/50K

Key Features

- Excellent thermal design; reducing heat and extending life of LED chips.
- Aluminium die-casting and outdoor rated powder coating housing.
- Long life, unique design provides 50,000 hours life.
- IP65 rated for outdoor use with 5 year warranty.
- Lumileds 3030 LED chips with high efficiency.
- Flex-In-Plug.


Applications

- Service stations, warehouses, factories, parking areas, bus and train stations, outdoor, etc.

TECHNICAL SPECIFICATIONS


Model.	LED TYPE	LED Q'ty (pcs)	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Housing colour	Warranty	IP RATING	Dimmable
FXRC130/50K	SMD	124pcs	5K	90~305V	120°	130W	13000lm	>80	White	5 years	IP65	NO
FXGSC150/50K	SMD	154pcs	5K	90~305V	120°	150W	18000lm	>80	White	5 years	IP65	1-10V

Product Dimensions (mm)



FXRC130/50K

A: 420mm B: 420mm C: 90mm

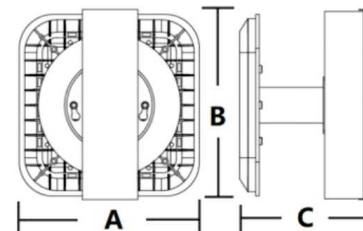

FXGSC150/50K

A: 480mm B: 480mm C: 245mm

Packing Details

FXRC130/50K

Net weight: 7.35 kg
Outer carton: 530 × 530 × 195 mm
Q'ty per carton: 1 pc
G.W per carton: 8 kg

FXGSC150/50K

Net weight: 8.2 kg
Outer carton: 720 × 550 × 260 mm
Q'ty per carton: 1 pc
G.W per carton: 10.2 kg