

### PRODUCT DETAILS



**100% OFF if no motion detected on Motion sensor mode after dusk.**




**PLS-FL200W/S**

### Key Features

- Solar LED Flood light with Motion Sensor.
- No AC power cables, no electrical charges.
- Die-Casting Aluminium body
- Polysilicon Solar panel
- Lithium battery, Remote controller included.
- Build-in dusk to dawn sensor
- 4.50M length cable from the flood light to the solar panel

MODEL NUMBER	Wattage	Materials	LED CHIPS	LUMENS	CCT	Solar Panel	Battery	Charging Time	Discharging Time	CRI	DIMMABLE	Warranty
PLS-FL200W/S	200W	Die-Casting Aluminium	SMD2835	20000lm	6000K	5V 30W	3.2V 24Ah	6-8 Hours	10-12 Hours	> 80	NO	2 years

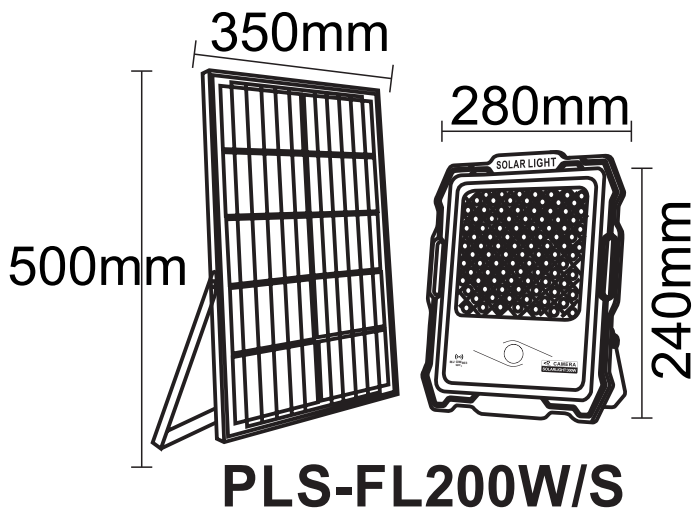

**PLS-FL200W/S**

### PACKING DETAILS:

Product: **PLS-FL200W/S**


Net Weight: 4.00 kgs

Outer ctn size: 565\*545\*405mm

Q'ty per ctn: 5 pcs

G.W per ctn: 23.00 kgs

### Changing Modes:

The light comes with 100% lumen output mode which is 100% brightness after dusk, If want to be motion sensor mode, please press the  button on the remote controller. Then press the **AUTO** button, the light will be back to 100% lumen output mode.

### Motion sensor mode:

When motion detected, the light will be 100% brightness, then 100% OFF if no motion detected after dusk.

**This flood light will come with the remote controller.**

