

Plusrite®

LED SLIM AREA LIGHT



Key Features

- Aluminum die-casting housing
- Excellent thermal design
- Operating temp : -30°C~50°C
- Multiple mounting options
- Type III
- 1-10V Dimming



Applications


- Parks Lighting
- Pathway Lighting
- Street Lighting
- Entryway Lighting




AL-25W-50W-75W-V2

AL-100W-125W-150W-V2

3K 4K 5K and 3 different wattage switchable. Please refer Plusrite Slim Area Light Installation Guide for details.



Net Weight: 3.80kgs
 Outer ctn size: 420*350*105mm
 Q'ty per ctn: 1 pc
 G.W per ctn: 4.30kgs



Beam Angle: Type III

A: 360mm B: 307mm C: 66mm

Multiple mounting options


Slip Fitter (**AL-SF-V2**)

6" Extruded Arm (**AL-EA6-V2**)

Yoke Mount (**AL-YK-V2**)




This bracket is for 60mm to 64mm diameter Round Pole Mount.




This bracket is for Square Pole Mount.




This bracket is for Wall Mount.




AL-2U-60MM



AL-2U-76MM



AL-76/60



AL-60/76



Model.	LED CHIPS	Colour Temperature	Voltage (V)	Beam Angle	Wattage (W)	Luminosity (lm)	CRI(Ra)	Housing colour	IP RATING
AL-25W-50W-75W-V2	Bridgelux 3030	3K/4K/5K	120~277v	Type III	25W/50W/75W	3500lm/7000lm/10500lm	80	Black	IP65
AL-100W-125W-150W-V2	Bridgelux 3030	3K/4K/5K	120~277v	Type III	100W/125W/150W	14000lm/17500lm/21000lm	80	Black	IP65
AL-SF-V2	Slip Fitter Bracket for 60mm to 64mm diameter Round Pole Mount								
AL-EA6-V2	6" Extruded Arm Bracket for Square Pole Mount								
AL-YK-V2	Yoke Wall Mount Bracket								
AL-2U-60MM	U Bracket for two slim area lights mounted at 180° with Slip Fitter bracket to 60mm diameter Round Pole Mount.								
AL-2U-76MM	U Bracket for two slim area lights mounted at 180° with Slip Fitter bracket to 76mm diameter Round Pole Mount.								
AL-76/60	76mm to 60mm Adaptor for 76mm Round Pole.								
AL-60/76	60mm to 76mm Adaptor for 60mm Round Pole.								

Plusrite®

LED SLIM AREA LIGHT




PRODUCT DETAILS




Hinged Tapered Octagonal Light Pole

Galvanised light Pole with foundation Cage




Unit: MM

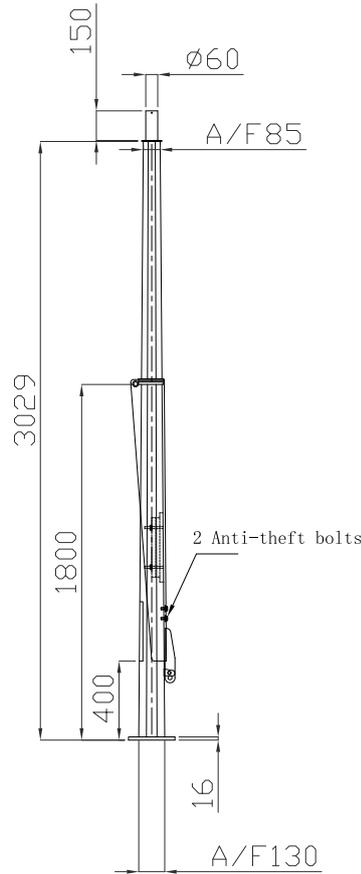

AL-3M-Black

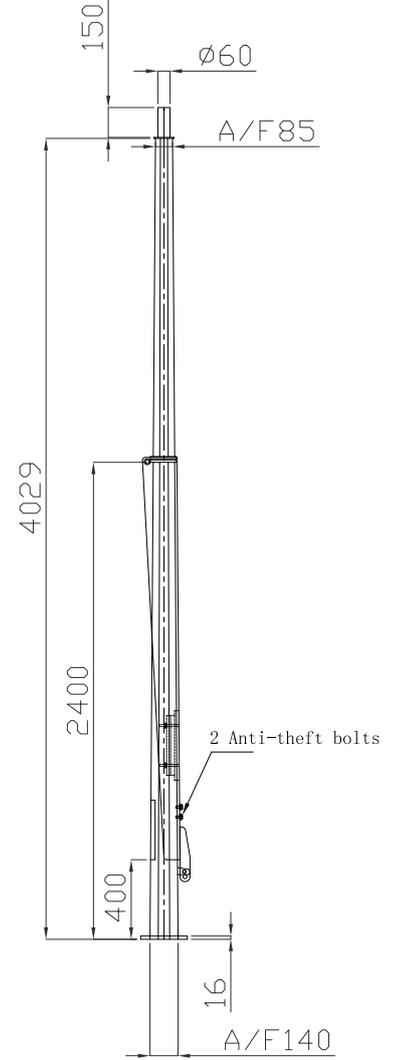

AL-4M-Black

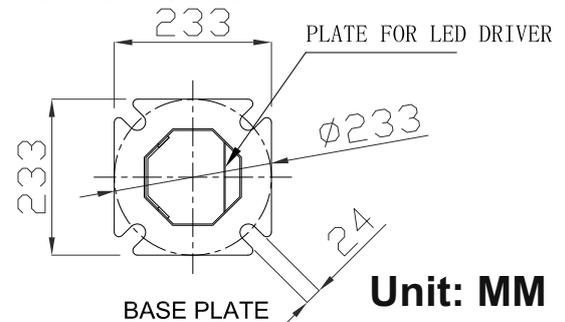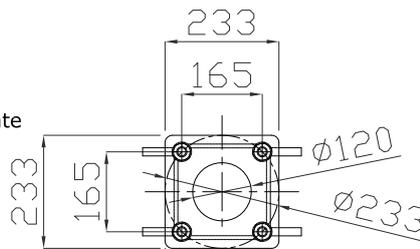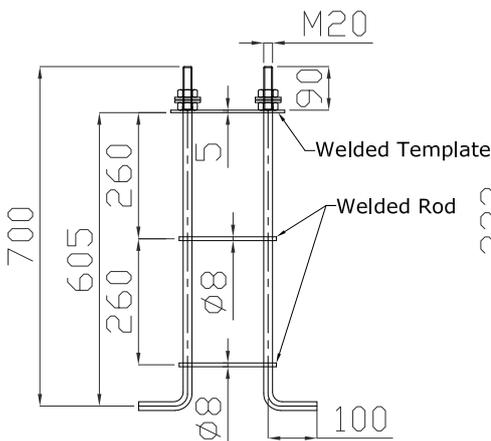

Unit: MM

Those special tools will come with your order.



Weight:

AL-3M-Black: 56.90Kgs

AL-4M-Black: 72.60Kgs

Foundation Cage: 10.60Kgs

FOUNDATION CAGE M20X700